


**EXISTING ATRIUM MECH. ROOM PLAN - HVAC DEMOLITION**  
 SCALE: 1/4" = 1'-0"

**DEMOLITION NOTES:**

1. CAP, SEAL, AND INSULATE TO MATCH EXISTING. FIELD VERIFY SIZE AND LOCATION OF EXISTING PIPING SHOWN TO BE REMOVED.
2. EXISTING DOMESTIC WATER HEATER TO BE REMOVED. SEE PLUMBING DRAWINGS FOR EXTENT OF EQUIPMENT AND DOMESTIC HOT WATER PIPING, CONTROLS, ETC. SHOWN TO BE REMOVED.
3. REMOVE EXISTING MPS, MPC, STEAM TRAPS, CONTROL VALVE, ETC., AS SHOWN HATCHED. FIELD VERIFY SIZE, LOCATION, AND EXTENT OF MATERIAL SHOWN TO BE REMOVED. COORDINATE REMOVAL OF PIPING WITH INSTALLATION OF NEW HOT WATER GENERATORS.
4. EXISTING DOMESTIC WATER STORAGE TANK TO BE REMOVED. SEE PLUMBING DRAWINGS FOR EXTENT OF PIPING, CONTROLS, ETC TO BE REMOVED.

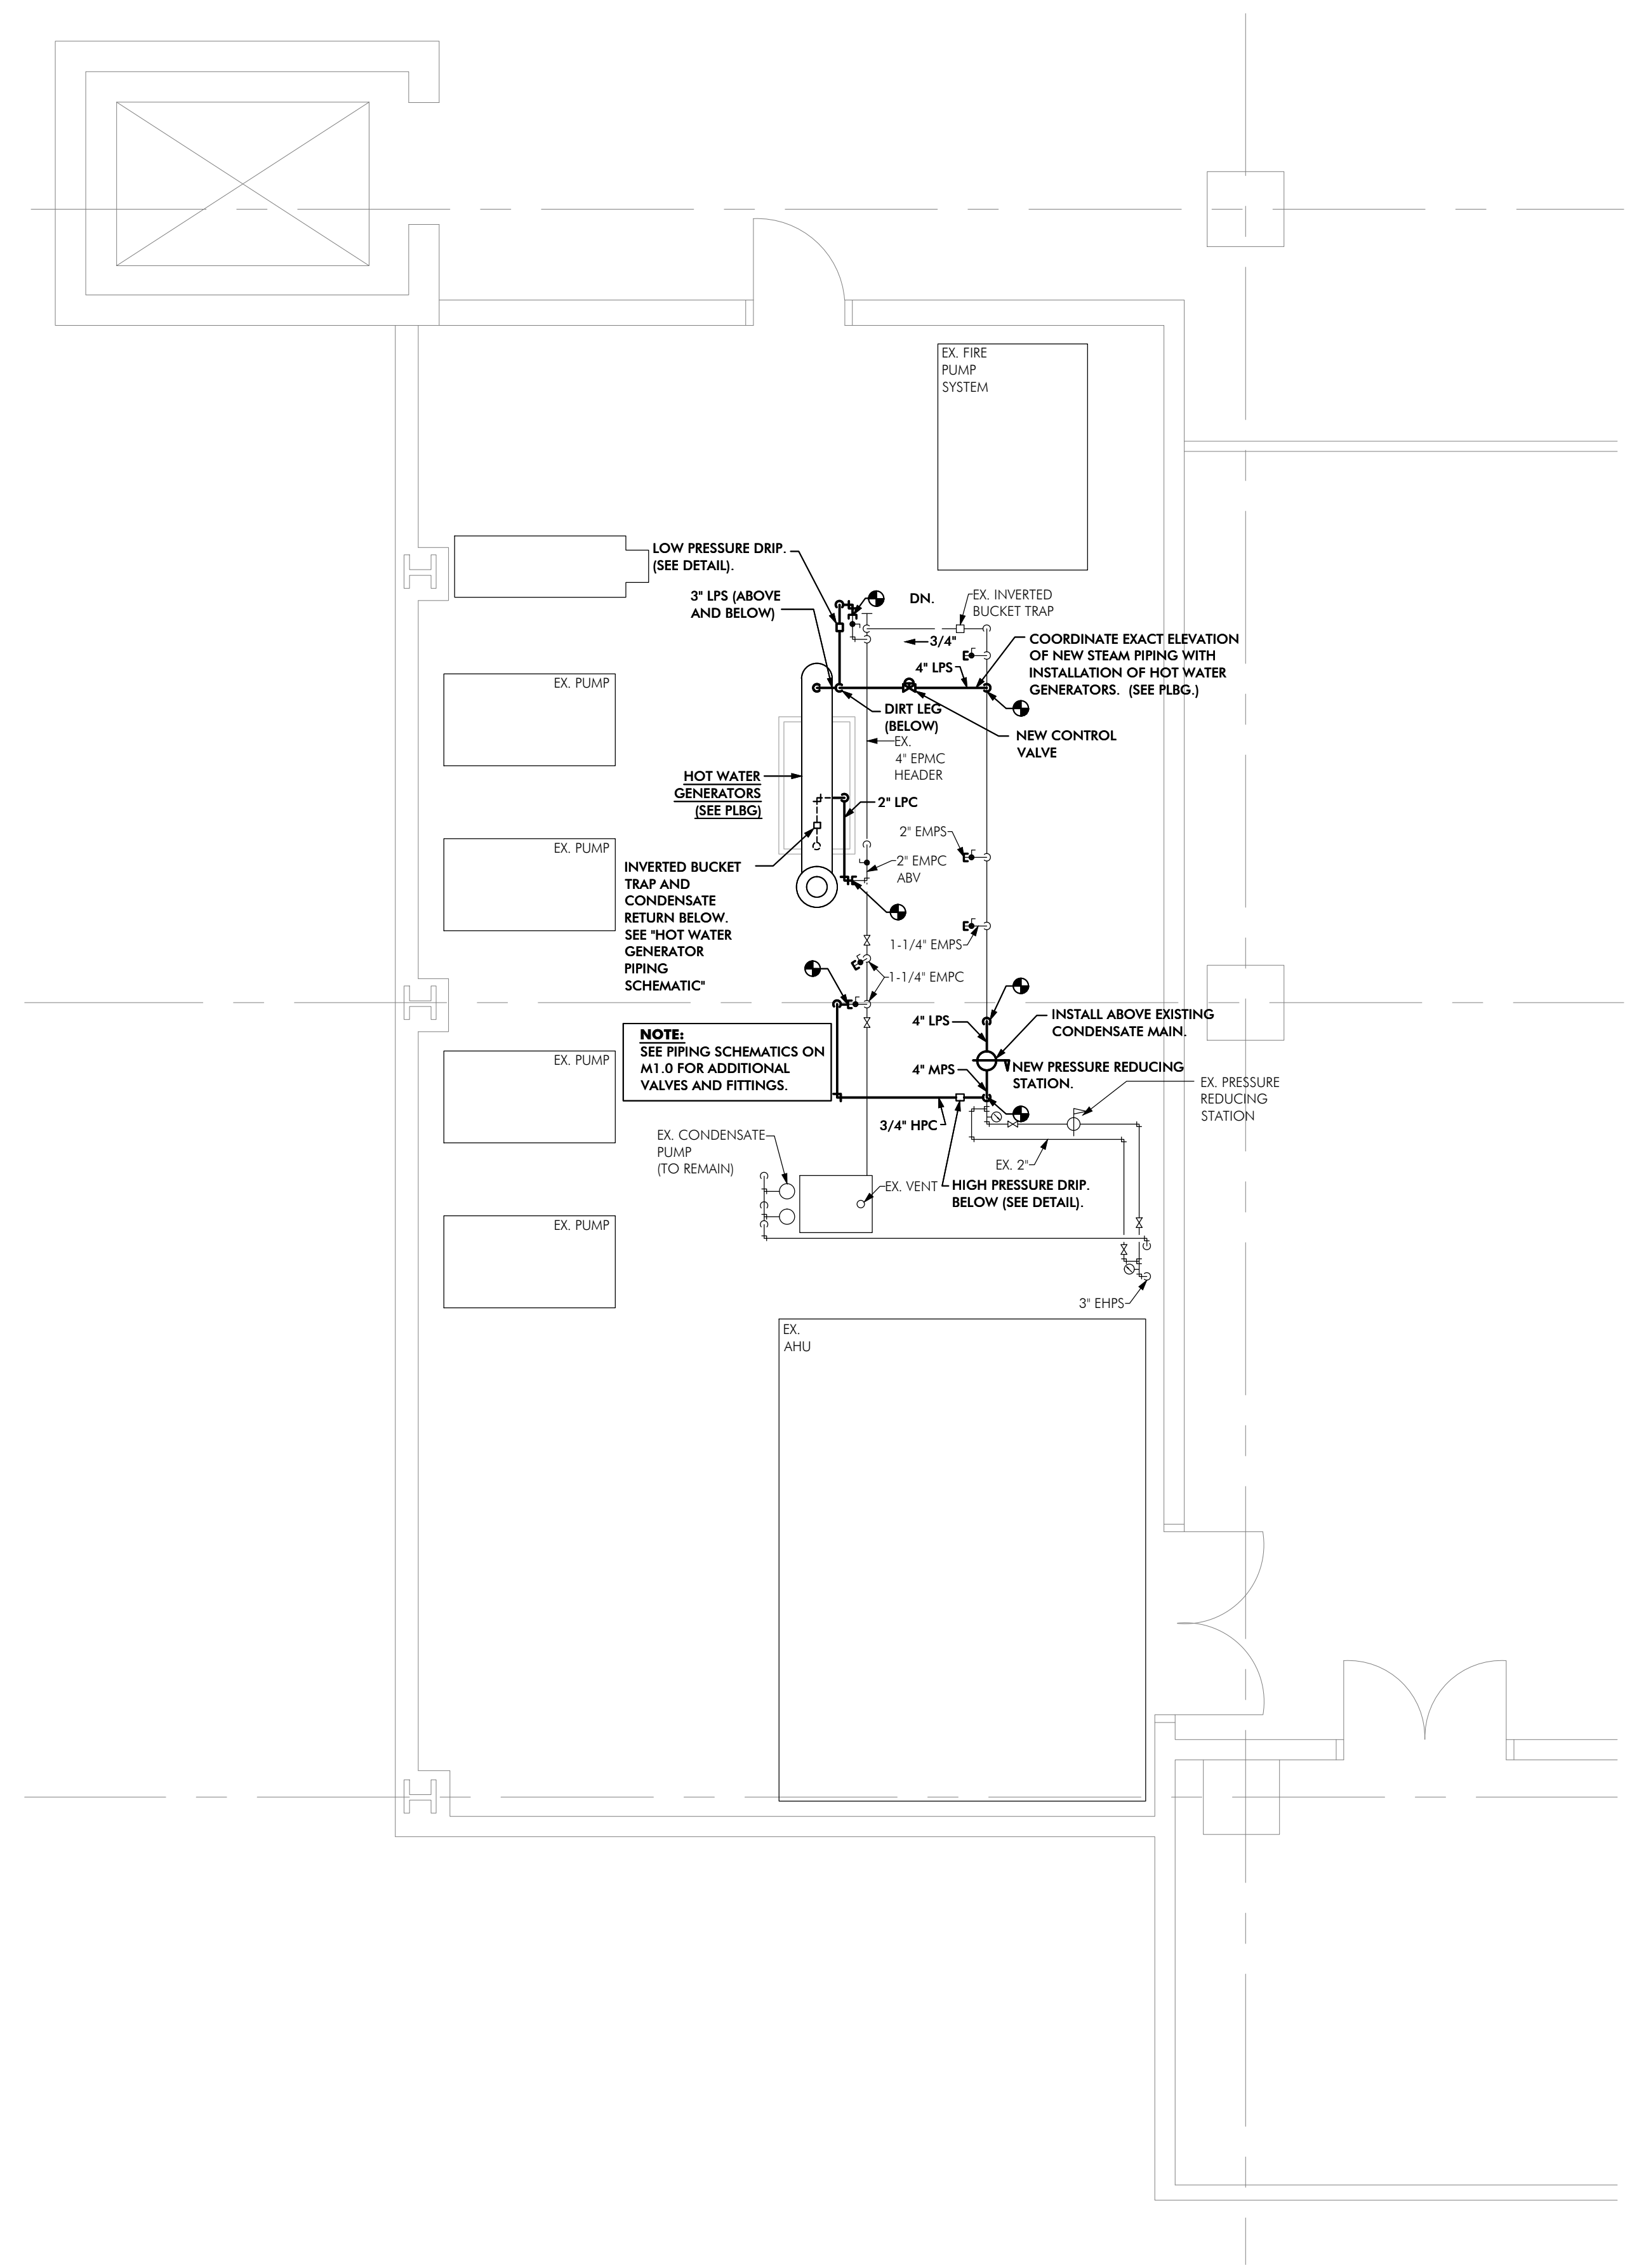

**EXISTING ATRIUM MECH. ROOM PLAN - HVAC NEW WORK**  
 SCALE: 1/4" = 1'-0"

**GENERAL NOTES:**

1. CONTRACTOR SHALL VERIFY LOCATION, SIZE AND ELEVATION OF ALL EXISTING PIPING PRIOR TO INSTALLING ANY NEW PIPE.
2. WHEREVER DISSIMILAR METALS ARE CONNECTED ON WATER LINES, A DIELECTRIC UNION SHALL BE USED.
3. COORDINATE ALL PIPE ROUTING TO AVOID CONFLICTS WITH STRUCTURAL, PLUMBING, AND ELECTRICAL FEATURES OF BUILDING.
4. WHERE FIXTURES OR EQUIPMENT ARE INDICATED TO BE REMOVED, CONTRACTOR SHALL REMOVE ALL PIPING AND CAP OR PLUG SAME BELOW FLOOR, ABOVE CEILING OR IN PARTITIONS AS REQUIRED.
5. MECHANICAL DRAWINGS ARE DIAGRAMMATIC AND DO NOT SHOW ALL DETAILS OF THE WORK. OBTAIN DIMENSIONS AND PERTINENT INFORMATION FROM VISITING THE SITE.

**BJCC Sheraton  
 Laundry & Kitchen  
 Domestic Hot Water System Modifications**  
 Birmingham, Alabama

**BID DOCUMENTS**

JOB	13065.1
DRAWN BY	DFC/BON
CHECKED BY	DEW
DATE	03/14/2014
REVISIONS	

TITLE	ATRIUM MECH. ROOM DEMOLITION & NEW WORK PLANS
SHEET	M2.0